




KALEA BAY

SERIES OF OUTDOOR LINEAR FIREPLACES

FOR OUTDOOR USE ONLY





GLASS MEDIA
PACKAGES AVAILABLE



ON/OFF/HIGH/LOW
REMOTE INCLUDED



2" TRIM REVEALED

FEATURES

- One fireplace single sided or see-through fireplace (convert to a see-through fireplace by simply removing the back panel and installing the additional windshield clips and windshield included from the factory)
- Clean contemporary outdoor linear gas fireplace, no chimney or venting required
- Firebox and burner assembly constructed of weather resistant 304 Stainless Steel
- Drop-in burner system for ease of installation and serviceability
- Available in four (4) opening sizes: 36" x 16" / 48" x 16" / 60" x 16" / 72" x 16" (actual opening)
- TFS (Thermocouple Flame Sense) battery operated electronic ignition system
- Includes On/Off/High/Low remote control (RCAF-3)
- Tempered glass windshield included to protect the flame in windy conditions
- Available in Natural Gas (NG) or Liquid Propane (LP) models
- Optional controls include wireless timer, wireless wall on/off switch, wireless wall high/low wall controls and wired switch
- 5 year on stainless steel components, 2 year on American Flame Gas Valve and electronic components, Copreci pilot igniter assembly. Commercial applications: 1 year all parts
- Tested and approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- VENT-KIT-6X12 included


MODELS

OFP-36LTFS-N	36" w x 16" h x 16" d opening dimensions. Natural Gas (31,000 Btu on High, 18,500 Btu on Low)
OFP-36LTFS-P	36" w x 16" h x 16" d opening dimensions. Liquid Propane (30,000 Btu on High, 19,500 Btu on Low)
OFP-48LTFS-N	48" w x 16" h x 16" d opening dimensions. Natural Gas (43,500 Btu on High, 24,500 Btu on Low)
OFP-48LTFS-P	48" w x 16" h x 16" d opening dimensions. Liquid Propane (42,500 Btu on High, 29,000 Btu on Low)
OFP-60LTFS-N	60" w x 16" h x 16" d opening dimensions. Natural Gas (50,000 Btu on High, 36,000 Btu on Low)
OFP-60LTFS-P	60" w x 16" h x 16" d opening dimensions. Liquid Propane (50,000 Btu on High, 36,000 Btu on Low)
OFP-72LTFS-N	72" w x 16" h x 16" d opening dimensions. Natural Gas (65,000 Btu on High, 42,000 Btu on Low)
OFP-72LTFS-P	72" w x 16" h x 16" d opening dimensions. Liquid Propane (60,000 Btu on High, 45,000 Btu on Low)

OPTIONAL ACCESSORIES

Glass Media	Reflective glass media for the Kalea Bay - Choose from GR-Black / GR-Bronze / GR-Cobalt / GR-Copper / GRL-Tahiti
WS	Wired wall mount switch (On/Off)
TM-R-AF1TX	Wireless wall mount timer (30/60/120min)
1322WT	Wireless wall mount switch (On/Off/High/Low)
1001D-AF1TX	Wireless wall mount switch (On/Off)
AF-4000ADP24(80)	110 volts AC adapter, converts to 7.5 DC volts for TFS systems
AF-4000HAT	Home/Pool automation transmitter system (works with most manufacturers systems)
326-930	Driftwood 6 piece twig set

KALEA BAY - SINGLE SIDED

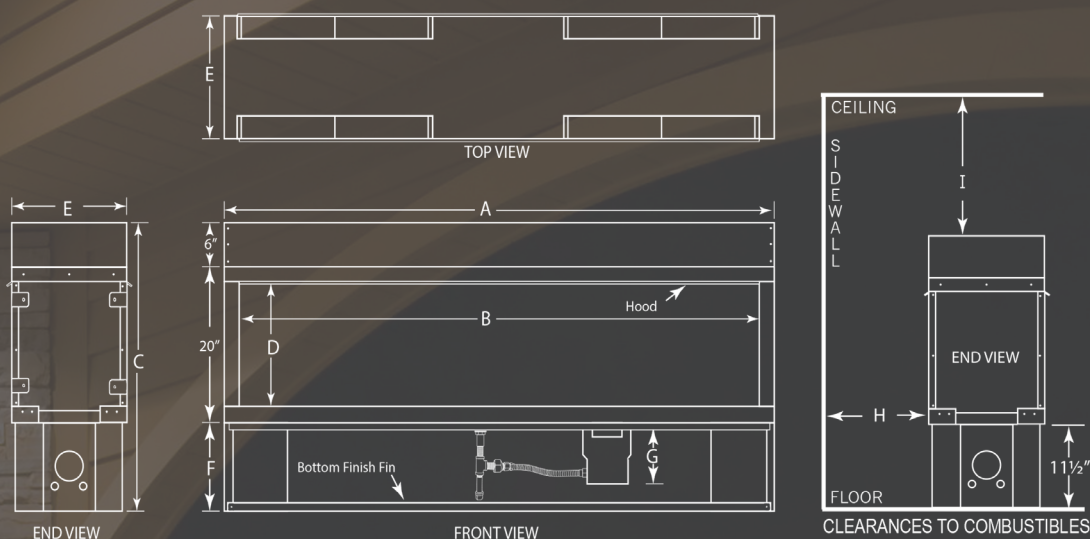

DIMENSIONS

Model	Model	A	B	C	D	E	F	G	H	I
		Overall Length	Inside Opening	Overall Height	Opening Height	Overall Depth	Leg Height	Valve Box Depth	Clearance to Combustible Side Wall	Clearance to Combustible Ceiling
NG	LP									
OFP-L36TFS-N	OFP-L36TFS-P	40"	36"	37 1/2"	16"	16"	11 1/2"	8 3/4"	6"	42 1/2"
OFP-L48TFS-N	OFP-L48TFS-P	52"	48"	37 1/2"	16"	16"	11 1/2"	8 3/4"	6"	42 1/2"
OFP-L60TFS-N	OFP-L60TFS-P	64"	60"	37 1/2"	16"	16"	11 1/2"	8 3/4"	6"	42 1/2"
OFP-L72TFS-N	OFP-L72TFS-P	76"	72"	37 1/2"	16"	16"	11 1/2"	8 3/4"	6"	42 1/2"

BTU INFORMATION

Model	Factory Orifice	NG Btu's High	NG Btu's Low	Low Rate Set Screw	Model	Factory Orifice	NG Btu's High	NG Btu's Low	Low Rate Set Screw
OFP-L36TFS-N	#42	31,000	18,500	#00	OFP-L36TFS-P	#52	30,000	19,500	#55
OFP-L48TFS-N	#35	43,500	24,500	#00	OFP-L48TFS-P	#48	42,500	29,000	#47
OFP-L60TFS-N	#31	50,000	36,000	#00	OFP-L60TFS-P	#45	50,000	36,000	#37
OFP-L72TFS-N	#29	65,000	42,000	#00	OFP-L72TFS-P	#42	60,000	45,000	#00


FRAMING

Framing Dimensions	Width	Height	Depth
OFP-L36TFS-N/P	40 1/2"	37 3/4"	16"
OFP-L48TFS-N/P	52 1/2"	37 3/4"	16"
OFP-L60TFS-N/P	64 1/2"	37 3/4"	16"
OFP-L72TFS-N/P	76 1/2"	37 3/4"	16"

PRESSURE

Pressure	Gas Type NG	Gas Type NG
Minimum Inlet	5.0 "WC	10.5 "WC
Maximum Outlet	10.5 "WC	13.0 "WC
Normal Inlet	7.0 "WC	11.0 "WC

KALEA BAY - SEE THROUGH

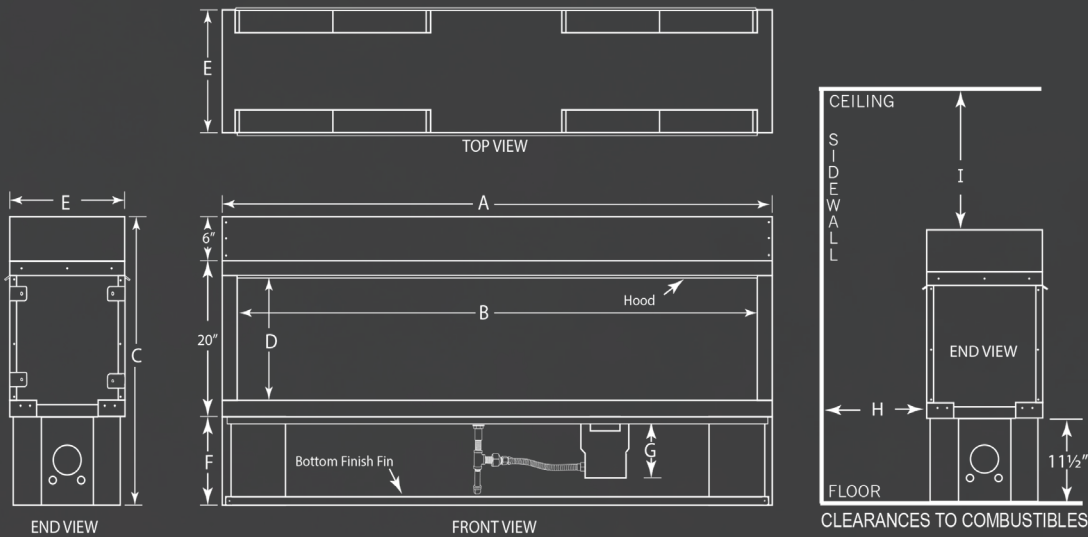

DIMENSIONS

Model	Model	A	B	C	D	E	F	G	H	I
		Overall Length	Inside Opening	Overall Height	Opening Height	Overall Depth	Leg Height	Valve Box Depth	Clearance to Combustible Side Wall	Clearance to Combustible Ceiling
NG	LP									
OFP-L36TFS-N	OFP-L36TFS-P	40"	36"	37 1/2"	16"	16"	11 1/2"	8 3/4"	36"	42 1/2"
OFP-L48TFS-N	OFP-L48TFS-P	52"	48"	37 1/2"	16"	16"	11 1/2"	8 3/4"	36"	42 1/2"
OFP-L60TFS-N	OFP-L60TFS-P	64"	60"	37 1/2"	16"	16"	11 1/2"	8 3/4"	36"	42 1/2"
OFP-L72TFS-N	OFP-L72TFS-P	76"	72"	37 1/2"	16"	16"	11 1/2"	8 3/4"	36"	42 1/2"

BTU INFORMATION

Model	Factory Orifice	NG Btu's High	NG Btu's Low	Low Rate Set Screw	Model	Factory Orifice	NG Btu's High	NG Btu's Low	Low Rate Set Screw
OFP-L36TFS-N	#42	31,000	18,500	#00	OFP-L36TFS-P	#52	30,000	19,500	#55
OFP-L48TFS-N	#35	43,500	24,500	#00	OFP-L48TFS-P	#48	42,500	29,000	#47
OFP-L60TFS-N	#31	50,000	36,000	#00	OFP-L60TFS-P	#45	50,000	36,000	#37
OFP-L72TFS-N	#29	65,000	42,000	#00	OFP-L72TFS-P	#42	60,000	45,000	#00

FRAMING

Framing Dimensions	Width	Height	Depth
OFP-L36TFS-N/P	40 1/2"	37 3/4"	16"
OFP-L48TFS-N/P	52 1/2"	37 3/4"	16"
OFP-L60TFS-N/P	64 1/2"	37 3/4"	16"
OFP-L72TFS-N/P	76 1/2"	37 3/4"	16"

PRESSURE

Pressure	Gas Type NG	Gas Type NG
Minimum Inlet	5.0 "WC	10.5 "WC
Maximum Outlet	10.5 "WC	13.0 "WC
Normal Inlet	7.0 "WC	11.0 "WC