



2017 CATALOG

THE BEST ROOM IN THE HOUSE
ISN'T IN THE HOUSE AT ALL

01 OUTDOOR FIREPLACES

| | |
|----------------------|----|
| Kalea Bay | 8 |
| OD42 | 10 |
| Key West See-Through | 12 |

02 FIRE FURNISHINGS

| | |
|-----------------------|----|
| Key West Bistro | 16 |
| Key West Coffee Table | 18 |

03 BURNER SYSTEMS

| | |
|--------------------------------------|----|
| Ignition Types | 22 |
| Listed Burners | 26 |
| Round Pan | 26 |
| Round Flat Disc | 28 |
| Square Pan | 30 |
| L Series | 32 |
| Non-Listed | 34 |
| AnF Outdoor Living Enclosures | 36 |
| Paver Kit Control Panels & Vent Kits | 38 |
| Burners | 40 |

04 JEWELRY

| | |
|-------------------|----|
| How Much Media | 44 |
| Media | 46 |
| Glass | 48 |
| Fire Pit Log Sets | 50 |

05 OPTIONAL ACCESSORIES

| | |
|--------------------|----|
| Controls | 54 |
| Glass Windshields | 55 |
| Lids | 56 |
| MSI Kits | 57 |
| Vent Kit | 57 |
| Hoses & Regulators | 58 |
| Key Valves | 59 |
| Valves & Fittings | 60 |
| Flex Lines | 61 |

06 DEALER TOOLS

| | |
|--------------------------|----|
| Kiosk | 62 |
| Authorized Dealer Banner | 62 |
| Jewelry Display | 63 |
| Glass Tower | 63 |



Firegear has partnered with CADdetails to provide you free and easy access to CAD drawings in multiple CAD and BIM formats, specifications, 3D models, product brochures, video and related documents. To access the Firegear CADdetails files, visit our home page www.firegearoutdoors.com, click on the CADdetails logo and follow the registration process.

OUR STORY



SKYTECH
PRODUCTS GROUP

In 1996, founders Chris Flick and Corbit Beasey started American Flame in Beasey's garage. Soon after, Flick and Beasey expanded their efforts with a second company, Skytech Systems. Together, the two companies established a commanding presence in the hearth industry. For more than a decade now, the families of companies are referred to as Skytech Products Group.

Flick attributes the companies' lasting success to three foundational credos:

A human being always answers the phone
Customer service is king
Try to ship within 24 hours

In 2013, Skytech purchased Firegear as a base for its entry into the outdoor hearth category. Skytech was convinced it could add depth and breadth to Firegear's product offering while infusing its timeless credos. Firegear continues to prove itself as a leader in the outdoor categories and has gained the trust of its customers and the respect of its peers. Manufacturers, Distributors and Dealers recognize Firegear for its product offering, knowledge base and their belief in the Skytech electronics that accompany Firegear's electronically operated systems.

Skytech Products Group continues to operate with one purpose – to provide extraordinary customer service. Our free technical support line is manned with live technicians during normal business hours. In addition to the technical support line, help videos are now available at firegearoutdoors.com and skytechpg.com to assist customers on their own schedule. Please know that we are committed to serving our customers before, during and after the sale.

ICON LEGEND

-  **BEST** Thermocouple Flame Sense
-  Intertek Listed
-  Available in Canada
-  **BETTER** Thermocouple Manual Safety
-  Underwriters Laboratories Listed
-  Liquid Propane
-  **GOOD** Match Throw
-  Available on CAD Details
-  Natural Gas
-  Made in USA

MAP POLICY

MINIMUM ADVERTISED POLICY

Skytech Products Group-Retail, including Skytech Systems and Firegear Outdoors (“SPG-Retail”), a Division of Skytech Products Group, has developed a Minimum Advertised Pricing (MAP) policy (the “Policy”) for all products sold by and purchased from SPG-Retail by and through traditional and/or online retailers (“Products”). In an effort to protect the image and value of SPG-Retail products and to maintain fair and equitable promotional and sales activity among its distributors, dealers, retailers and other resellers (each, a “Retailer”), SPG-Retail has developed the MAP Policy effective immediately. The MAP Policy and its terms and conditions are as follows:

POLICY

Subject to certain exceptions set forth below, no Retailer shall, at any time, advertise or promote any SPG-Retail Products for sale or resale at a price lower than the MAP pricing established by SPG-Retail for such Products.

APPLICATION

The MAP Policy shall apply to all promotions and/or advertisements of any Products purchased from SPG-Retail that appear in any media form, including, without limitation, written or electronic flyers, posters, coupons, mailers, inserts, newspapers, magazines, catalogs, mail order catalogs, Internet, online, or similar electronic media, websites, email newsletters, email solicitations, television, radio, and/or public signage. The MAP Policy shall not apply to (a) any in-store advertising displayed by a Retailer, in-store displays, point-of-sale signs, hang tags or bar codes, or similar product price packaging which merely state the price of such product; (b) the promotion or advertisement of discontinued Product, so long as such Product is clearly marked as discontinued within said advertisement or promotion; and (c) the actual price at which any Products are sold to an individual consumer at or from a Retailer’s physical location or via telephone.

OTHER TERMS & CONDITIONS

MAP pricing is subject to change from time to time at the sole discretion of SPG-Retail and can be accessed by contacting SPG-Retail Divisions at (888) 672 8929, or by written request via email at skytechii@skytechpg.com or info@firegearoutdoors.com. It shall be the responsibility of all Retailers to remain current as to MAP Policy, pricing, and any changes thereto.

The MAP Policy shall apply to all Products sold to SPG-Retail distributors and resold thereby to any Internet or online dealers and retailers, and such distributors shall take all necessary steps to enforce the MAP Policy in connection with each and every such resale.

By accepting Products from SPG-Retail and in consideration of continued access to Products and the benefits realized as an SPG-Retail preferred, approved Retailer, each Retailer accepts and all Products they purchase from SPG-Retail shall be and remain subject to the MAP Policy as set forth herein. Should it be determined that any Product subject to the MAP Policy is or has been advertised or promoted at a price below the MAP pricing established for said Product by SPG-Retail at any time, the violating Retailer shall immediately take all steps necessary to cure said violation and bring its advertising, promotion, pricing and sales activity into compliance with the MAP Policy. SPG-Retail hereby, at any time, reserves the right to discontinue the shipment of Products to the violating Retailer and/or its distributor, and the right to terminate future sales of Products to said violating Retailer and/or its distributor, subject to the parties’ respective financial and confidential obligations that shall survive such termination.



OUTDOOR FIREPLACES



KALEA BAY

SERIES OF OUTDOOR LINEAR FIREPLACES



FEATURES

- One fireplace single sided or see-through fireplace (convert to a see-through fireplace by simply removing the back panel and installing the additional windshield clips and windshield included from the factory)
- Clean contemporary outdoor linear gas fireplace, no chimney or venting required
- Firebox and burner assembly constructed of weather resistant 304 Stainless Steel
- Drop-in burner system for ease of installation and serviceability
- Available in four (4) opening sizes: 36" x 16" / 48" x 16" / 60" x 16" / 72" x 16" (actual opening)
- TFS (Thermocouple Flame Sense) battery operated electronic ignition system
- Includes On/Off/High/Low remote control (RCAF-3)
- Tempered glass windshield included to protect the flame in windy conditions
- Available in Natural Gas (NG) or Liquid Propane (LP) models
- Optional controls include wireless timer, wireless wall on/off switch, wireless wall high/low wall controls and wired switch
- 5 year on stainless steel components, 2 year on American Flame Gas Valve and electronic components, Copreci pilot igniter assembly. Commercial applications: 1 year all parts
- Tested and approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- VENT-KIT-6X12 included

MODELS

- OFP-36LTFS-N / P** Kalea Bay Linear Outdoor Fireplace- 36" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (31,000 Btu on High, 18,500 Btu on Low) Liquid Propane (30,000 Btu on High, 19,500 Btu on Low)
-
- OFP-48LTFS-N / P** Kalea Bay Linear Outdoor Fireplace- 48" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (43,500 Btu on High, 24,500 Btu on Low) Liquid Propane (42,500 Btu on High, 29,000 Btu on Low)
-
- OFP-60LTFS-N / P** Kalea Bay Linear Outdoor Fireplace- 60" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (50,000 Btu on High, 36,000 Btu on Low) Liquid Propane (50,000 Btu on High, 36,000 Btu on Low)
-
- OFP-72LTFS-N / P** Kalea Bay Linear Outdoor Fireplace- 72" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (65,000 Btu on High, 42,000 Btu on Low) Liquid Propane (60,000 Btu on High, 45,000 Btu on Low)

OPTIONAL ACCESSORIES

- | | |
|------------------|--|
| Glass Media | Reflective glass media for the Kalea Bay - Choose from GR-Black / GR-Bronze / GR-Cobalt / GR-Copper / GRL-Tahiti |
| 326-930 | Driftwood 6 piece twig set |
| TM-R-AF1TX | Wireless wall mount timer (30/60/120min) |
| 1322WT | Wireless wall mount switch (On/Off/High/Low) |
| 1001D-AF1TX | Wireless wall mount switch (On/Off) |
| WS | Wired wall mount switch (On/Off) |
| AF-4000ADP24(80) | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems |
| AF-4000HAT | Home/Pool automation transmitter system (works with most manufacturers systems) |

FOR OUTDOOR USE ONLY!



2" TRIM REVEALED



ON/OFF/HIGH/LOW REMOTE INCLUDED



GLASS MEDIA PACKAGES AVAILABLE



OD42

OUTDOOR FIREPLACE



FEATURES

- 42" Stainless Steel Firebox with Reflective Panels
- 30" Stainless Steel Burner comes with Copper Reflective Fireglass
- Viewing window is 35 1/4" x 12 3/4"
- Clean contemporary outdoor linear gas fireplace, no chimney or venting required
- Battery Operated Electronic Ignition with Safety Valve. The Safety Valve will turn the gas OFF in case of flame loss
- Includes On/Off Switch
- A Tempered Glass Windshield is included to protect the flame in windy conditions
- Available with your choice of a 2" or 4" Brushed Stainless Steel Faceplate
- Includes Weather Cover to protect your fireplace when not in operation
- Natural Gas and Propane models available - 44,500 Btu Natural Gas / 43,500 Btu Propane
- 5 Year Consumer Warranty on Stainless Steel Components, 2 Year on Gas Valve, Pilot and Igniter Assembly and Electronic Components. 1 Year all parts in Commercial Applications
- Tested to CAN/CGA-2.17-M91 / IAS 4-96 (US) / CGA CR97-003 (CAN) 4001172

MODELS

OD42-N Outdoor Linear Fireplace includes 2" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Natural Gas

OD42-P Outdoor Linear Fireplace includes 2" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Propane

OD42-4-N Outdoor Linear Fireplace includes 4" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Natural Gas

OD42-4-P Outdoor Linear Fireplace includes 4" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Propane

OPTIONAL ACCESSORIES

326-900 Steel stud framing kit. Overall dimensions 60" wide x 20" deep x 52 1/2" high

326-930 Driftwood 6 piece twig set

1001-A Wireless hand held remote (On/Off)


VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

FOR OUTDOOR USE ONLY!



KEY WEST SEE-THROUGH

OUTDOOR SEE-THROUGH FIREPLACE

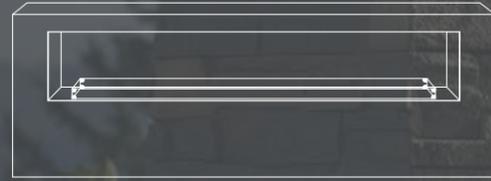

FEATURES: KWST 42

- Steel Stud Framing Kit (KD - Knock Down) with Stainless Steel Reflective Side Walls and Ceiling Panels
- Overall Dimensions: 64 1/16" Wide x 51" Tall x 19" Deep
- Viewing window: 42" Wide x 20 7/16" Tall
- FPB-30LTFS-N or FPB-30LTFS-P Stainless Steel Burner with Fireglass
- Battery operated Thermocouple Flame Sense "TFS" Electronic Ignition System features a safety shut OFF in case of loss of flame and auto re-light
- Includes On/Off/High/Low remote control (RCAF-3)
- Natural Gas & Propane models available
- 30% to 50% turn down from high to low - Natural Gas (42,000 Btu on High, 23,000 Btu on low) Propane (42,000 Btu on high, 30,000 Btu on low)
- Optional controls include wireless timer, wireless wall on/off switch, wireless wall high/low wall controls and wireless switch
- 5 Year Consumer Warranty on Stainless Steel Components. 2 Year on Gas Valve, Pilot and Igniter Assembly and Electronic Components. 1 Year all parts in Commercial Applications
- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories

MODELS

KWST-42-N FPB-30LTFS-N or P, Steel Stud Framing Kit (KD - Knock Down) Ready to assemble, pre-drilled and labeled. Stainless Steel Reflective Side Walls and Ceiling Panel, Fireglass (10lb.), GWS-3810 Glass Windshield, On/Off/High/Low Remote Control (RCAF-3)

KWST-82-N (2) FPB-30LTFS-N or P, Ready to Finish Enclosure (Assembled), Fireglass (20lb.), GWS-6810 Glass Windshield, On/Off/High/Low Remote Control (RCAF-3)

OPTIONAL ACCESSORIES

- 377-909 Key West See Through kit propane drawer kit (KWST-42-N only)
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws (KWST-42-N only)
- 326-930 Driftwood 6 piece twig set
- TM-R-AF1TX Wireless wall mount timer (30/60/120min)
- 1322WT Wireless wall mount switch (On/Off/High/Low)
- 1001D-AF1TX Wireless wall mount switch (On/Off)
- WS Wired wall mount switch (On/Off)
- AF-4000ADP24(80) 110 volts AC adapter, converts to 7.5 DC volts for TFS systems
- AF-4000HAT Home/Pool automation transmitter system (works with most manufacturers systems)
- LID-30L Linear stainless steel lid with brushed finish for the KWST-42
- LID-68L Linear stainless steel lid with brushed finish for the KWST-82

FEATURES: KWST 82

- Unfinished Enclosure (assembled) with a 6" x 12" Vent Kit included
- Overall dimensions: 102" Wide x 54 1/2" Tall x 24" Deep
- Viewing window: 81 1/2" Wide x 19 1/2" Tall
- (2) FPB-30LTFS-N or (2) FPB-30LTFS-P Stainless Steel Burner with Fireglass
- Battery operated Thermocouple Flame Sense "TFS" Electronic Ignition System features a shut OFF in case of loss of flame and auto re-light
- Includes On/Off/High/Low remote control (RCAF-3)
- Natural Gas & Propane models available
- 30% to 50% turn down from high to low - Natural Gas (84,000 Btu on High, 46,000 Btu on low) Propane (84,000 Btu on high, 60,000 Btu on low)
- Optional controls include wireless timer, wireless wall on/off switch, wireless wall high/low wall controls and wireless switch
- 5 Year Consumer Warranty on Stainless Steel Components. 2 Year on Gas Valve, Pilot and Igniter Assembly and Electronic Components. 1 Year all parts in Commercial Applications
- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories

FOR OUTDOOR USE ONLY!



FIRE FURNISHINGS



KEY WEST BISTRO

FIRE FURNISHING FOR OUTDOOR LIVING

FOR OUTDOOR USE ONLY!




FEATURES



- The base of the Bistro Fire Table is finished with an Iron Grey ultraviolet powder coating
- Table measures 24 5/8" Tall (floor to top), Top measures 35 7/8" Square with Mitered Corners
- Choice of Iron Grey or Stainless Steel Top
- 35,000 Btu, operates on an 20 lb. Propane Tank hidden inside the table (tank sold separately)
- Match Light Ignition with Safety Valve that turns the gas supply off in case of flame loss
- Dining Leaf insert included, matches top color, creates a flat surface when optional Glass Windshield is removed
- Ships as Propane, Natural Gas Conversion Kit available (376-968)
- Tested and Listed by Intertek for installation in USA and Canada
- 5 Year Limited Lifetime Warranty

TABLE TOPS



IRON GREY - KWBTO-L/IG



STAINLESS STEEL - KWBTO-L/SS

MODELS

KWBTO-L/IG Key West Bistro Table with Iron Grey Base and Top, KWBTO-L, 286-924 Iron Grey Top, 34,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

KWBTO-L/SS Key West Bistro Table with Iron Grey Base and Stainless Steel Top, 286-927 Stainless Steel Top, 34,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

OPTIONAL ACCESSORIES

- 286-968 Key West Bistro Table Natural Gas conversion kit
- 326-930 Driftwood 6 piece twig set
- 286-932 Tempered Glass Windshield (14 1/2" Long x 14 1/2" Wide x 6" Tall) Black Polyester Cover included
- 286-938 Protective Weather Cover



KEY WEST COFFEE TABLE

FIRE FURNISHING FOR OUTDOOR LIVING

FOR OUTDOOR USE ONLY!




FEATURES

- The base of the Coffee Fire Table is finished with a Sunset Bronze ultraviolet powder coating
- Table measures 19 1/4" Tall (floor to top) - Top measures 48" Length x 24" Width
- Choice of Stainless Steel or Sunset Bronze Top
- 49,000 Btu, operates on an 11 lb. Propane Tank hidden inside the table (tank sold separately)
- Battery Operated Electronic Ignition System with Safety Valve that turns off the gas supply in case of flame loss
- Dining Leaf insert included, matches top color, creates a flat surface when optional Glass Windshield is removed
- Ships as Propane, Natural Gas Conversion Kit available (376-968)
- Tested and Listed by Intertek for installation in USA and Canada

TABLE TOPS



STAINLESS STEEL - KWCH-P-SS

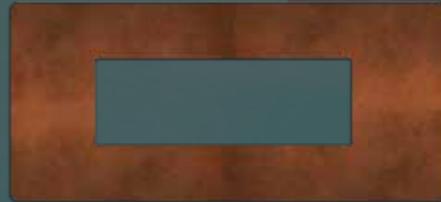

SUNSET BRONZE - KWCH-P-BR

MODELS

KWCH-P-SS Key West Coffee Table with Stainless Steel Top, KWCH-L1, 377-927 Table Top, 49,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

KWCH-P-BR Key West Coffee Table with Sunset Bronze Top, KWCH-L1, 377-926 Table Top, 49,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

OPTIONAL ACCESSORIES

- 376-968 Natural Gas conversion kit for Key West Coffee Table (KWCH-P-SS & KWCH-P-BR), 50,000 BTU
- 326-930 Driftwood 6 piece twig set
- GWS-3812 Tempered Glass Windshield (38" Long x 12 7/8" Wide x 7 1/2" Tall)
- 376-029 Black Polyester Cover for GWS-3812
- 377-938 Protective Weather Cover for Key West Coffee Table



BURNER SYSTEMS



IGNITION TYPE MATCH THROW (MT)



MSI KIT
OPTIONAL


HOW TO LIGHT

1. Insert key into shut-off valve and secure key onto square end of the valve.
2. Light a long match or Butane lighter and hold it near the burner.
3. Turn the key counter-clockwise on gas valve (until it stops) to allow gas to flow and simultaneously apply the long burning match or Butane lighter as close to the end of the burner as possible.
4. Gas should ignite within 10 seconds or less. If fire pit does not light within 10 seconds turn key clockwise to turn OFF the gas supply. Ensure there is not too much media on top of the burner that might inhibit gas flow and try again in 5-minutes.

FEATURES

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Pans Available in Round, Square and Flat Disc Configurations in a Variety of Sizes
- Consumer Warranty: 5 year on stainless steel components, 2 year on gas key valve
Commercial Applications: 1 year all parts
- Optional Accessory: Manual Spark Igniter "MSI" Kit featuring Piezo Ignition (MSI-BSMTI)

IGNITION TYPE THERMOCOUPLE MANUAL SAFETY (TMS)

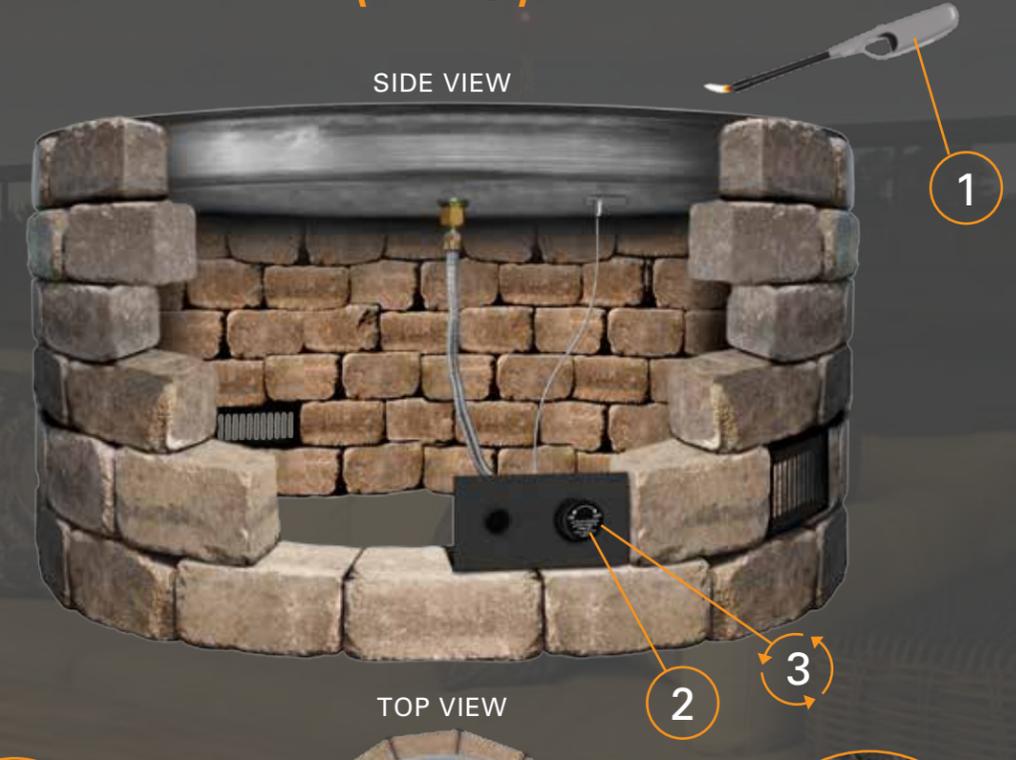

MSI KIT
OPTIONAL

THERMOCOUPLE

HOW TO LIGHT


1. Light a long match or Butane lighter and hold it near the burner.
2. Rotate the control knob of the gas valve counter-clockwise to the ON position.
3. Depress control knob inward and push to light the burner at the same time.
4. After the fire pit lights continue to depress the control knob for 30 seconds then release knob. If the fire pit does not light within 30 seconds, release knob, turn knob clockwise to turn OFF and wait 5 minutes before trying again.

FEATURES


- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Thermocouple Manual Safety TMS Technology
- Safety Valve turns gas OFF when flame goes out
- Robust Ignition System With Full Btu Output
- Pans Available in Round, Square and Flat Disc Configurations in a Variety of Sizes
- Consumer Warranty: 5 year on stainless steel components, 2 year on Copreci gas valve, thermocouple and igniter assembly components. Commercial Applications: 1 year all parts
- Optional Accessory: Manual Spark Igniter "MSI" Kit featuring Piezo Ignition (MSI-BSTMS)

IGNITION TYPE THERMOCOUPLE FLAME SENSE (TFS)

SIDE VIEW

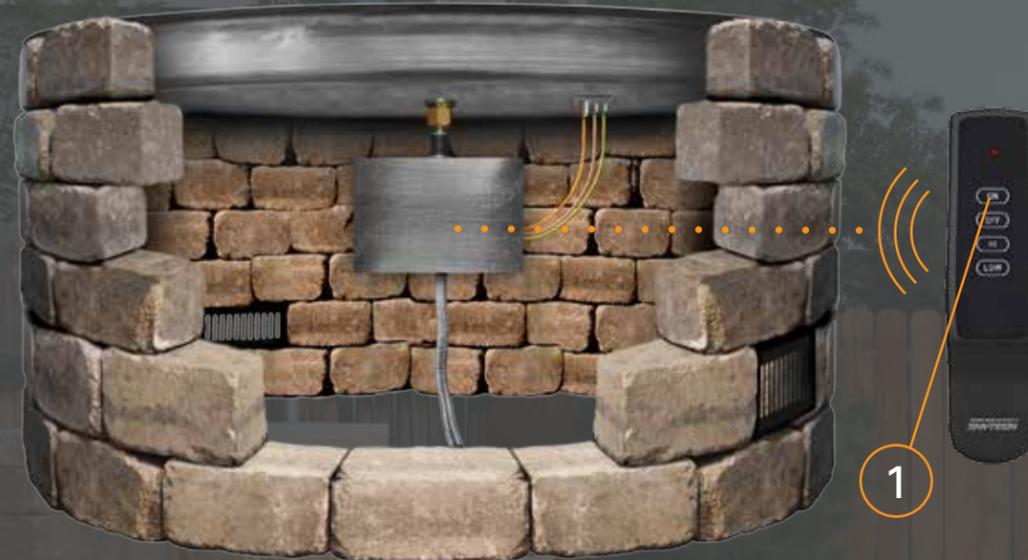

TOP VIEW



IGNITER &
THERMOCOUPLE



AF-4000ADP24(80)
OPTIONAL

HOW TO LIGHT

1. Press the ON button on the hand-held remote transmitter. You will hear the igniter probe begin sparking for 15 seconds and the fire pit will ignite.
2. If the fire pit does not light the module will start to "beep" one time every second indicating an ignition error. If this occurs press the OFF button on the transmitter and repeat step 1.
3. If fire pit does not light after second try, turn main gas OFF, wait 5 minutes and repeat steps 1-3.

FEATURES



- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Thermocouple Flame Sense TFS technology with Reliable Direct Spark Ignition (Non Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Pans Available in Round, Square and Flat Disc Configurations in a Variety of Sizes
- Ignition System features automatic re-light
- Robust Ignition System with full Btu output
- Includes On/Off/High/Low Remote Control (RCAF-3TX)
- 40% - 50% Turn Down From High to Low (varies by model)
- Consumer Warranty: 5 year on stainless steel components, 2 year on American Flame gas valve, pilot assembly and electronic components. Commercial Applications: 1 year all parts
- Optional Accessory: A/C adapter for continuous power (AF-4000ADP24(80)) (Pictured above)

TFS ADVANTAGES


The outdoor fire pit industry's only battery operated electronic ignition system

Can be operated by up to three (3) optional controls at the same time

Optional A/C adapter for continuous power when needed

Home / Pool automation system friendly, using the optional AF-4000HAT

USING THE AF-4000HAT TO CONNECT TO YOUR EXISTING HOME/POOL SYSTEM



WIRED

This is Firegear's Home/Pool Automation Transmitter. It allows you to operate your Firegear TFS product from the same controller you're used to using your pool system. It's important to note that even though you are using the HAT, you can still use your original remote that came with your TFS unit.



AF-4000HAT

WIRED

WIRELESS



OPTIONAL CONTROLS FOR THE TFS SYSTEM



1332WT



TM-R-AF1TX



WS



1001D-AF1TX

ROUND PAN

BURNER SYSTEMS TESTED & LISTED BY UNDERWRITERS LABORATORIES

ROUND STAINLESS STEEL TFS BURNER SYSTEMS

FPB-19RBTFS-N 19" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Natural Gas, 80,000 Btu on High, 45,000 Btu on Low

FPB-25RBTFS-N 25" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-29RBTFS-N 29" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-33RBTFS-N 33" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-19RBTFS-P 19" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 79,000 Btu on High, 47,400 Btu on Low

FPB-25RBTFS-P 25" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low

FPB-29RBTFS-P 29" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low

FPB-33RBTFS-P 33" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low




ROUND STAINLESS STEEL TMS BURNER SYSTEMS

FPB-19RBTMS-N 19" Stainless Pan with Stainless Steel 16" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu

FPB-25RBTMS-N 25" Stainless Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu

FPB-29RBTMS-N 29" Stainless Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu

FPB-33RBTMS-N 33" Stainless Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu



ROUND STAINLESS STEEL MT BURNER SYSTEMS

FPB-16RBSMT-N 16" Stainless Pan with 12" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 45,500 Btu

FPB-19RBSMT-N 19" Stainless Pan with 16" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

FPB-25RBSMT-N 25" Stainless Pan with 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

FPB-29RBSMT-N 29" Stainless Pan with 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

FPB-33RBSMT-N 33" Stainless Pan with 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu



TFS OPTIONAL ACCESSORIES

| | |
|------------------|---|
| TM-R-AF1TX | Wireless wall mount timer (30/60/120min) |
| 1001D-AF1TX | Wireless wall mount switch (On/Off) |
| 1322WT | Wireless wall mount switch (On/Off/High/Low) |
| AF-4000ADP24(80) | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems |
| AF-4000HAT | Home/Pool automation transmitter system (works with most manufacturers systems) |
| VENT-KIT-6X12 | Includes two (2) 6" tall x 12" wide vents with mounting screws |
| LIDS | Stainless Steel lids with brushed finished available on page 56 |
| WINDSHIELDS | Tempered glass windshields available on page 55 |

TMS OPTIONAL ACCESSORIES

| | |
|---------------|---|
| LPK#41 | Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-19,25/29/33RBTMS-N |
| MSI-BSTMS | Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit Includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery |
| VENT-KIT-6X12 | Includes two (2) 6" tall x 12" wide vents with mounting screws |
| LIDS | Stainless Steel lids with brushed finished available on page 56 |
| WINDSHIELDS | Tempered glass windshields available on page 55 |

MT OPTIONAL ACCESSORIES

| | |
|---------------|---|
| LPK#47 | Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-16RBSMT-N, 45,000 Btu |
| LPK#41 | Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-19/25/29/33RBSMT-N, 65,000 Btu |
| MSI-BSMTI | Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery |
| VENT-KIT-6X12 | Includes two (2) 6" tall x 12" wide vents with mounting screws |
| LIDS | Stainless Steel lids with brushed finished available on page 56 |
| WINDSHIELDS | Tempered glass windshields available on page 55 |

For fire pits built with pavers, refer to page 38 & 39 for Paver Kit Control Panels & Paver Vent Kits

Custom shapes and sizes available by quote

ROUND FLAT DISC

BURNER SYSTEMS TESTED & LISTED BY UNDERWRITERS LABORATORIES

FLAT DISC STAINLESS STEEL TFS BURNER SYSTEMS

FPB-29DBSTFS-N 29" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-34DBSTFS-N 34" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-44DBSTFS-N 44" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-29DBSTFS-P 29" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low

FPB-34DBSTFS-P 34" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low

FPB-44DBSTFS-P 44" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low




FLAT DISC STAINLESS STEEL TMS BURNER SYSTEMS

FPB-29DBSTMS-N 29" Round Stainless Steel Disc with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu

FPB-34DBSTMS-N 34" Round Stainless Steel Disc with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu

FPB-44DBSTMS-N 44" Round Stainless Steel Disc with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu




FLAT DISC STAINLESS STEEL MT BURNER SYSTEMS

FPB-29DBSMT-N 29" Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

FPB-34DBSMT-N 34" Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

FPB-44DBSMT-N 44" Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

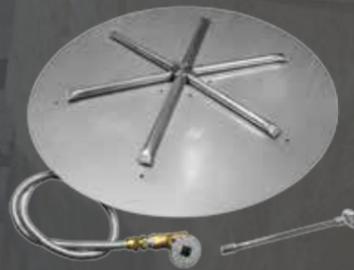

TFS OPTIONAL ACCESSORIES

- TM-R-AF1TX Wireless wall mount timer (30/60/120min)
- 1001D-AF1TX Wireless wall mount switch (On/Off)
- 1322WT Wireless wall mount switch (On/Off/High/Low)
- AF-4000ADP24(80) 110 volts AC adapter, converts to 7.5 DC volts for TFS systems
- AF-4000HAT Home/Pool automation transmitter system (works with most manufacturers systems)
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

TMS OPTIONAL ACCESSORIES

- LPK#41 Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-29,34,44DBSTMS-N, 65,000 Btu
- MSI-BSTMS Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

MT OPTIONAL ACCESSORIES

- LPK#41 Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-29,34,44DBSMT-N, 65,000 Btu
- MSI-BSMTI Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

For fire pits built with pavers, refer to page 38 & 39 for Paver Kit Control Panels & Paver Vent Kits

Custom shapes and sizes available by quote

SQUARE PAN

BURNER SYSTEMS TESTED & LISTED BY UNDERWRITERS LABORATORIES


SQUARE STAINLESS STEEL TFS BURNER SYSTEMS

- FPB-20SBSTFS-N 20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Natural Gas, 80,000 Btu on High, 48,000 Btu on Low
- FPB-26SBSTFS-N 26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
- FPB-32SBSTFS-N 32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
- FPB-38SBSTFS-N 38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
- FPB-20SBSTFS-P 20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 79,000 Btu on High, 47,400 Btu on Low
- FPB-26SBSTFS-P 26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low
- FPB-32SBSTFS-P 32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low
- FPB-38SBSTFS-P 38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 60,000 Btu on Low



SQUARE STAINLESS STEEL TMS BURNER SYSTEMS

- FPB-20SBSTMS-N 20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu
- FPB-26SBSTMS-N 26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu
- FPB-32SBSTMS-N 32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu
- FPB-38SBSTMS-N 38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu

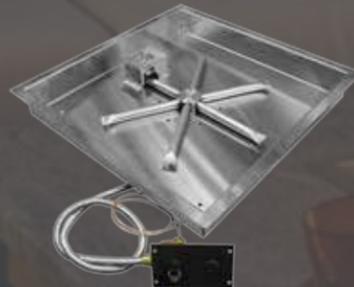

SQUARE STAINLESS STEEL MT BURNER SYSTEMS

- FPB-20SBSMT-N 20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
- FPB-26SBSMT-N 26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
- FPB-32SBSMT-N 32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
- FPB-38SBSMT-N 38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu



TFS OPTIONAL ACCESSORIES

- TM-R-AF1TX Wireless wall mount timer (30/60/120min)
- 1001D-AF1TX Wireless wall mount switch (On/Off)
- 1322WT Wireless wall mount switch (On/Off/High/Low)
- AF-4000ADP24(80) 110 volts AC adapter, converts to 7.5 DC volts for TFS systems
- AF-4000HAT Home/Pool automation transmitter system (works with most manufacturers systems)
- LIDS Stainless Steel lids with brushed finished available on page 56
- WINDSHIELDS Tempered glass windshields available on page 55
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

TMS OPTIONAL ACCESSORIES

- LPK#41 Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-19/25/29/33RBSMT-N, FPB-20/26/32/38SBSMT-N, FPB-34/44DBSMT-N, 65,000 Btu
- MSI-BSTMS Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit Includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery
- LIDS Stainless Steel lids with brushed finished available on page 56
- WINDSHIELDS Tempered glass windshields available on page 55
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

MT OPTIONAL ACCESSORIES

- LPK#41 Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-20/26/32/38SBSMT-N, 65,000 Btu
- MSI-BSMTI Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery
- LIDS Stainless Steel lids with brushed finished available on page 56
- WINDSHIELDS Tempered glass windshields available on page 55
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

For fire pits built with pavers, refer to page 38 & 39 for Paver Kit Control Panels & Paver Vent Kits

Custom shapes and sizes available by quote

L SERIES

THE COMPLETE CUSTOMIZABLE OUTDOOR BURNER SYSTEM
TESTED & LISTED BY UNDERWRITERS LABORATORIES



FEATURES

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Available in Thermocouple Flame Sense (TFS) Piloted Version and Match Throw (MT) systems
- Combine any two sizes end to end for a complete custom burner in various lengths
- Adjustable burner cradle flanges allow for varying thickness's of top finishing materials (Granite, Marble, Stone, Tile etc.) Ranging from 1/2" to 2 3/4" thick
- Installation cradle remains in place allowing it to be installed under the surface of the top finishing material - no fear of warping, which can cause cracked top surfaces
- Easy "Lift-Out" burner assembly for easy access to service as needed
- Industry best clearances to combustibles
- Thermocouple Flame Sense (TFS) includes On/Off/High/Low remote control
- Stainless Steel Ignition Components for greater reliability
- Consumer Warranty: 5 year on stainless steel components, 2 year on American Flame gas valve and electronic components, Copreci pilot and igniter assembly. Commercial Application: 1 year all parts

L SERIES TFS BURNER SYSTEMS

| | |
|--------------|--|
| FPB-24LTFS-N | "L" Series 24" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Natural Gas: 35,000 Btu's High 20,000 Btu's Low |
| FPB-30LTFS-N | "L" Series 30" Stainless steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Natural Gas: 42,000 Btu's High 23,000 Btu's Low |
| FPB-36LTFS-N | "L" Series 36" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Natural Gas: 55,000 Btu's High 37,000 Btu's Low |
| FPB-24LTFS-P | "L" Series 24" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Liquid Propane: 35,000 Btu's High 20,000 Btu's Low |
| FPB-30LTFS-P | "L" Series 30" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Liquid Propane: 42,000 Btu's High 23,000 Btu's Low |
| FPB-36LTFS-P | "L" Series 36" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Liquid Propane: 55,000 Btu's High 37,000 Btu's Low |

L SERIES MT BURNER SYSTEMS

| | |
|-------------|---|
| FPB-24LMT-N | "L" Series 24" Stainless Steel Burner and Pan in Burner Cradle - Match Throw System includes Key Valve, Key Valve Cover and Key, 35,000 Btu Natural Gas |
| FPB-30LMT-N | "L" Series 30" Stainless Steel Burner and Pan in Burner Cradle - Match Throw System includes Key Valve, Key Valve Cover and Key, 45,000 Btu Natural Gas |
| FPB-36LMT-N | "L" Series 36" Stainless Steel Burner and Pan in Burner Cradle - Match Throw System includes Key Valve, Key Valve Cover and Key, 52,000 Btu Natural Gas |

For fire pits built with pavers, refer to page 38 & 39 for Paver Kit Control Panels & Paver Vent Kits

L SERIES OPTIONAL ACCESSORIES

| | |
|------------------|--|
| TM-R-AF1TX | Wireless wall mount timer (30/60/120min) |
| 1001D-AF1TX | Wireless wall mount switch (On/Off) |
| 1322WT | Wireless wall mount switch (On/Off/High/Low) |
| WS | Wired wall mount switch (On/Off) |
| AF-4000ADP24(80) | 110 volts AC adapter, converts to 7.5 DC volts for TFS systems |
| AF-4000HAT | Home/Pool automation transmitter system (works with most manufacturers systems) |
| LPK#50 | Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-24LMT-N, 40,000 Btu |
| LPK#48 | Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-30LMT-N, 47,000 Btu |
| LPK#44 | Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-36LMT-N, 60,000 Btu |
| LIDS | Stainless Steel lids with brushed finished available on page 56 |
| WINDSHIELDS | Tempered glass windshields available on page 55 |
| VENT-KIT-6X12 | Includes two (2) 6" tall x 12" wide vents with mounting screws |
| TRIM-L24 | 3/4" stainless steel decorative trim fits FPB-24L Series |
| TRIM-L30 | 3/4" stainless steel decorative trim fits FPB-30L Series |
| TRIM-L36 | 3/4" stainless steel decorative trim fits FPB-36L Series |
| TRIM-L48 | 3/4" stainless steel decorative trim fits (2) FPB-24L Series end to end |
| TRIM-L60 | 3/4" stainless steel decorative trim fits (2) FPB-30L Series end to end |
| TRIM-L72 | 3/4" stainless steel decorative trim fits (2) FPB-36L Series end to end |

COMBINING L SERIES BURNERS

Take any two burners and combine them together to create a completely custom fire feature.



Custom shapes and sizes available by quote



NON-LISTED

FACTORY TESTED - HIGH BTU OUTPUT

ROUND STAINLESS STEEL NON-LISTED HIGH BTU MT BURNER SYSTEMS

FPB-19RBS16MT-N 19" Round Stainless Steel Pan, Stainless Steel 16" Burning Spur, MT, for Natural Gas, 60,000 Btu

FPB-25RBS22MT-N 25" Round Stainless Steel Pan, Stainless Steel 22" Burning Spur, MT, for Natural Gas, 100,000 Btu

FPB-29RBS22MT-N 29" Round Stainless Steel Pan, Stainless Steel 22" Burning Spur, MT, for Natural Gas, 100,000 Btu

FPB-33RBS31MT-N 33" Round Stainless Steel Pan, Stainless Steel 31" Burning Spur, MT, for Natural Gas, 160,000 Btu



SQUARE STAINLESS STEEL NON-LISTED HIGH BTU MT BURNER SYSTEMS

FPB-20SBS16MT-N 20" Square Stainless Steel Pan, Stainless Steel 16" Burning Spur, MT, for Natural Gas, 60,000 Btu

FPB-26SBS22MT-N 26" Square Stainless Steel Pan, Stainless Steel 22" Burning Spur, MT, for Natural Gas, 100,000 Btu

FPB-32SBS31MT-N 32" Square Stainless Steel Pan, Stainless Steel 31" Burning Spur, MT, for Natural Gas, 160,000 Btu

FPB-38SBS36MT-N 38" Square Stainless Steel Pan, Stainless Steel 36" Burning Spur, MT, for Natural Gas, 183,000 Btu




ROUND FLAT DISC STAINLESS STEEL NON-LISTED HIGH BTU MT BURNER SYSTEMS

FPB-29DBS31MT-N 29" Round Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT ignition for Natural Gas, 100,000 BTU

FPB-34DBS31MT-N 34" Round Stainless Steel Disc, 31" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 160,000 Btu

FPB-44DBS36MT-N 44" Round Stainless Steel Disc, 36" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 183,000 Btu

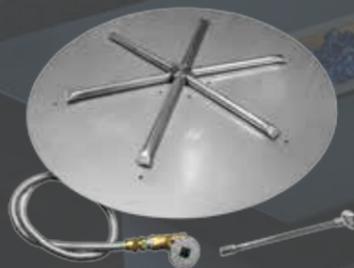


LINE OF FIRE

LOF-30MT-N Stainless Steel Pan & Burner, MSI Ignition for Natural Gas, 45,000 Btu

LOF-36MT-N Stainless Steel Pan & Burner, MSI Ignition for Natural Gas, 65,000 Btu

LOF-30MSI-N Stainless Steel Burner, MSI Ignition for Natural Gas, 45,000 Btu

LOF-36MSI-N Stainless Steel Burner, MSI Ignition for Natural Gas, 65,000 Btu



ROUND NON-LISTED OPTIONAL ACCESSORIES

- OAS-LP45 Propane Conversion Kit (Orifice/Air Shutter) for 16" Burning Spur, 55,000 Btu
- OAS-LP35 Propane Conversion Kit (Orifice/Air Shutter) for 22" Burning Spur, 99,000 Btu
- OAS-LP29 Propane Conversion Kit (Orifice/Air Shutter) for 31" Burning Spur, 150,000 Btu
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

SQUARE NON-LISTED OPTIONAL ACCESSORIES

- OAS-LP45 Propane Conversion Kit (Orifice/Air Shutter) for 16" Burning Spur, 55,000 Btu
- OAS-LP35 Propane Conversion Kit (Orifice/Air Shutter) for 22" Burning Spur, 99,000 Btu
- OAS-LP29 Propane Conversion Kit (Orifice/Air Shutter) for 31" Burning Spur, 150,000 Btu
- OAS-LP25 Propane Conversion Kit (Orifice/Air Shutter) for 36" Burning Spur, 182,000 Btu
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

FLAT DISC NON-LISTED OPTIONAL ACCESSORIES

- OAS-LP35 Propane Conversion Kit (Orifice/Air Shutter) for 22" Burning Spur, 99,000 Btu
- OAS-LP29 Propane Conversion Kit (Orifice/Air Shutter) for 31" Burning Spur, 150,000 Btu
- OAS-LP25 Propane Conversion Kit (Orifice/Air Shutter) for 36" Burning Spur, 182,000 Btu
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

LINE OF FIRE NON-LISTED OPTIONAL ACCESSORIES

- OAS-LP49 Propane Conversion Kit (Orifice/Air Shutter) for LOF-30 Series, 43,000 Btu
- OAS-LP41 Propane Conversion Kit (Orifice/Air Shutter) for LOF-36 Series, 65,000 Btu
- LID-LOF30 Linear stainless steel lid with brushed finish for the LOF-30 Series
- LID-LOF36 Linear stainless steel lid with brushed finish for the LOF-36 Series
- VENT-KIT-6X12 Includes two (2) 6" tall x 12" wide vents with mounting screws

For fire pits built with pavers, refer to page 38 & 39 for Paver Kit Control Panels & Paver Vent Kits

Custom shapes and sizes available by quote


AnF (Assemble n Finish)

OUTDOOR LIVING ENCLOSURES

FEATURES

- Assemble within minutes of opening the packaging
- AnF framework is constructed of 16 gauge Galvanized steel and powder coated with Zinc Epoxy Primer – engineered to protect from outdoor elements
- Zinc Epoxy Powder Coating is used in a number of applications including automotive coatings
- Exterior sides are factory clad with 1/2" PermaBase® cement board. PermaBase is impact resistant, extremely durable and dimensionally stable. It has overall flexural, compressive and tensile strength characteristics, highly moisture resistant and will not rot, disintegrate or swell when exposed to water
- Pre-punched holes and self tapping stainless steel screws allow for quick assembly
- Heavy duty adjustable Zinc Plated leveling legs with large flat bottom for stability
- Top is constructed of 12mm MGO (Magnesium Oxide Board)
- Burner template marked on top for Firegear's most popular size burners
- Each AnF includes (2) 12" x 6" vents to provide the required 18 sq" of cross ventilation
- Each AnF cabinet ships on its own specially designed skid. The packaging is engineered to help protect from potential damage in shipping
- 3 units stacked is possible within the warehouse for round units
- Compression tested with 700lbs - no structural failure
- Built to last, backed up by a 5 year limited warranty


ROUND KD ASSEMBLY

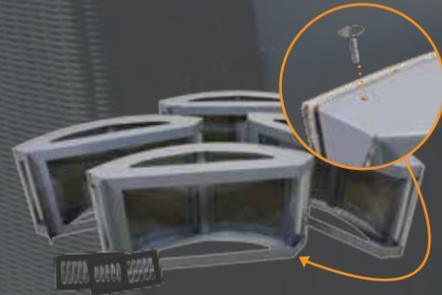


The AnF Round comes shipped as 4 individual pieces. Start by installing the leveling legs into the bottom of the unit. Make sure you screw the bolt in until their is about 1" of clearance.



Place the 4 pieces together. Line up the holes on each piece with the corresponding holes and drill in the self tapping screws. Do this for all 8 screws.

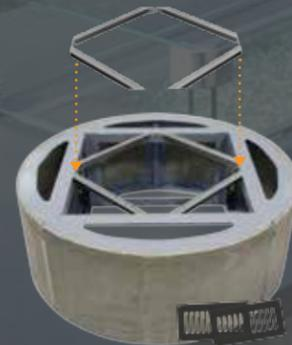

Install the 45° angle cross bars. This allows the round pit to be used for both Firegear round and square pans.

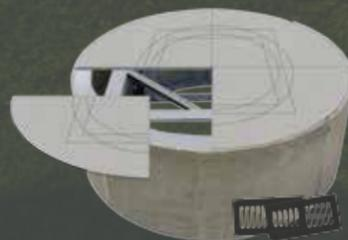

The AnF comes with a 12mm MGO top. This piece is marked for Firegear's most common square and round burners. Cut out your desired burner size, then attach the board and the installation is complete.



ROUND



LINEAR



SQUARE



AnF ONLY

AnF ROUND SERIES

| | |
|---------|---|
| ANF-R42 | Knock-Down 42" diameter x 18" tall - round fire pit |
| ANF-R48 | Knock-Down 48" diameter x 18" tall - round fire pit |
| ANF-R60 | Knock-Down 60" diameter x 18" tall - round fire pit |

AnF LINEAR SERIES

| | |
|---------|---|
| ANF-L48 | Knock-Down 48" long x 24" wide x 18" tall - linear fire pit |
| ANF-L66 | Knock-Down 66" long x 24" wide x 18" tall - linear fire pit |
| ANF-L74 | Knock-Down 74" long x 24" wide x 18" tall - linear fire pit |
| ANF-L90 | Knock-Down 90" long x 24" wide x 18" tall - linear fire pit |

AnF SQUARE SERIES

| | |
|---------|--|
| ANF-S48 | Knock-Down 48" diameter x 18" tall - square fire pit |
| ANF-S60 | Knock-Down 60" diameter x 18" tall - square fire pit |

AnF ENCLOSURE & FIRE PIT BURNER COMBINATIONS

AnF ROUND PACKAGES

BEST

| | |
|-----------------|---|
| ANFR42-19RTFS-N | 42" Round AnF with a 19" Round TFS System (Natural Gas) |
| ANFR42-19RTFS-P | 42" Round AnF with a 19" Round TFS System (Propane) |
| ANFR48-19RTFS-N | 48" Round AnF with a 19" Round TFS System (Natural Gas) |
| ANFR48-19RTFS-P | 48" Round AnF with a 19" Round TFS System (Propane) |

BETTER

| | |
|-----------------|---|
| ANFR42-19RTMS-N | 42" Round AnF with a 19" Round TMS System (Natural Gas) |
| ANFR48-19RTMS-N | 48" Round AnF with a 19" Round TMS System (Natural Gas) |

GOOD

| | |
|----------------|--|
| ANFR42-19RMT-N | 42" Round AnF with a 19" Round MT System (Natural Gas) |
| ANFR48-19RMT-N | 48" Round AnF with a 19" Round MT System (Natural Gas) |

AnF LINEAR PACKAGES

BEST

| | |
|-----------------|--|
| ANFL48-30LTFS-N | 48" Round AnF with a 30" L Series TFS System (Natural Gas) |
| ANFL48-30LTFS-P | 48" Round AnF with a 30" L Series TFS System (Propane) |

GOOD

| | |
|------------------|---|
| ANFL48-30LMT-N | 48" Round AnF with a 30" L Series MT System (Natural Gas) |
| ANFR48-LOF30MT-N | 48" Round AnF with a 30" Line of Fire MT System (Natural Gas) |

Custom shapes and sizes available by quote

PAVER KIT CONTROL PANELS



PAVER-KIT-MT

For use when building fire pit enclosures with pavers used with Match Throw "MT" Burner Systems.


- Face Plate for Key Valve with Rubber Plug for MSI hole
- Paver Kit Bracket and Extender
- Screws
- Fittings
- Tapcon® concrete anchors
- Key Valve Kit included as part of the FPB Series Kit



PAVER-KIT-MT-MSI

For use when building fire pit enclosures with pavers used with Match Throw "MT" Burner Systems.

- Face plate for Key Valve and MSI
- Paver Kit Bracket and Extender
- Screws
- Battery Operated Piezo Igniter Assembly
- 48" Ignition Wire
- AAA Battery
- Ignition Hood
- Screen Fittings
- Tapcon® concrete anchors
- Key Valve Kit included as part of FPB Series Kit

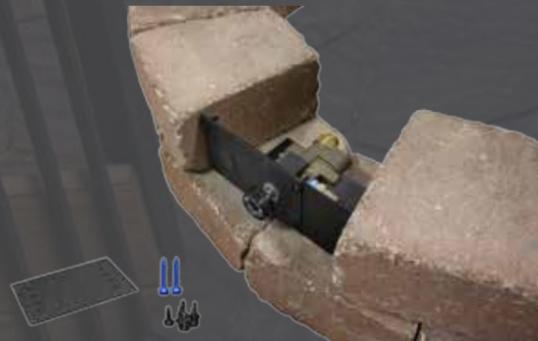

PAVER-KIT-TMS

For use when building fire pit enclosures with pavers with FPB Series Thermocouple Manual Safety "TMS" Burner Systems.

- Paver Kit Bracket and Extender
- Screws
- Fittings
- Tapcon® concrete anchors
- TMS Valve Kit and Face Plate included as part of FPB Series Kit.



PAVER-KIT-TMS-MSI

For use when building fire pit enclosures with pavers with FPB Series Thermocouple Manual Safety "TMS" Burner System.

- Paver Kit Bracket and Extender
- Screws
- Battery Operated Piezo Igniter Assembly
- 48" Ignition Wire
- AAA Battery
- Ignition Hood
- Screen
- Fittings
- Tapcon® concrete anchors
- TMS Valve Kit with Face Plate included as part of FPB Series Kit.



VENT KITS

FOR PAVER KIT CONTROL PANELS



PAVER-VENT-4

Paver Vent Kit: includes (2) 3 5/8" tall x 8" wide vents with mounting plate, extension plate extends overall size up to 10" wide and (2) Tapcon® concrete anchors. Each vent provides 18 square inches of ventilation.



PAVER-VENT-6

Paver Vent Kit: includes (2) 5 5/8" tall x 8" wide vents with mounting plate, extension plate extends overall size up to 10" wide and (2) Tapcon® concrete anchors. Each vent provides 18 square inches of ventilation.

BURNERS

BURNING SPUR

For a natural-looking flame that mimics a wood-burning fire, the Burning Spur's innovative design and superior construction (made of 304 stainless steel) is the choice of outdoor fire professionals. Backed by our 5 year warranty, Firegear Burning Spur's will keep the fire going strong, season after season.

To design the ultimate campfire feature, choose the Burning Spur, Burning Spur kit or pan/disc burner system that fits your design and ignition system. Pans and burners are available in a range of sizes, from 16" to 44".

FEATURES

- Constructed of 304 stainless steel in order to stay robust in all weather conditions
- Every leg has been specifically designed to be able to house an ignition system
- Internal dam built inside the center of the Burning Spur helps prohibit water flowing back into the gas line
- The legs feature a pitched design letting water run off easily
- The bottom hub features weep holes for water release so there is no freeze / thaw damage
- LP conversion kits available in order to convert from Natural Gas to Propane
- Cooling points between each spur leg helps prevent heat transfer to the outer edge to avoid top material from cracking
- We offer a consumer warranty of 5 years, also a commercial warranty of 1 year
- The stock sizes come in 12", 16", 22", 31", 36" (measured tip to tip)



SPUR KIT - MT

Burner, Orifice, 1/2" OD Flare x 1/2" MIP, 46" Stainless Steel Tranquiline Gas Flex, 1/2" OD Flare x 1/2" FIP, Key Valve, Polished Chrome Cover and 8" Polished Chrome Key



SPUR ONLY - MT

Burner, Orifice, 1/2" Flare x 1/2" OD FIP

MODELS

| KIT | SPUR | DESCRIPTION | LP ORIFICE | BTU (NG) | BTU (LP) |
|---------|--------|--|------------|-------------|-------------|
| DBS-12K | DBS-12 | 12" - 304 Stainless Steel Burning Spur | OAS-LP52 | 42,000 Btu | 33,000 Btu |
| DBS-16K | DBS-16 | 16" - 304 Stainless Steel Burning Spur | OAS-LP45 | 60,000 Btu | 55,000 Btu |
| DBS-22K | DBS-22 | 22" - 304 Stainless Steel Burning Spur | OAS-LP35 | 100,000 Btu | 99,000 Btu |
| DBS-31K | DBS-31 | 31" - 304 Stainless Steel Burning Spur | OAS-LP29 | 160,000 Btu | 150,000 Btu |
| DBS-36K | DBS-36 | 36" - 304 Stainless Steel Burning Spur | OAS-LP25 | 183,000 Btu | 182,000 Btu |



FIRE RING



FEATURES

- 19 gauge, 304 Stainless Steel
- For Natural Gas or Liquid Propane (Conversion kit required for LP)
- We offer a 1 year consumer and commercial warranty
- Stock sizes come in 6", 12", 18", 24", 30", 36" and 48" (outside diameter)



SINGLE RING BURNERS

FG-FR-6SS 6" Single Ring Burner, 1/2" NPT inlet, includes plug and Allen wrench, 88,000 Btu



DOUBLE RING BURNERS

FG-FR-12SS 12" Double Ring Burner, 1/2" NPT inlet, includes plug and Allen wrench, 92,000 Btu

FG-FR-18SS 18" Double Ring Burner, 1/2" NPT inlet, includes plug and Allen wrench, 147,000 Btu

FG-FR-24SS 24" Double Ring Burner, 1/2" NPT inlet, includes plug and Allen wrench, 296,000 Btu



TRIPLE RING BURNERS

FG-FR-30SS 30" Triple Ring Burner, 3/4" NPT inlet, includes 3/4" to 1/2" adapter, plug and Allen wrench, 435,000 Btu

FG-FR-36SS 36" Triple Ring Burner, 3/4" NPT inlet, includes 3/4" to 1/2" adapter, plug and Allen wrench, 443,000 Btu

FG-FR-48SS 48" Triple Ring Burner, 3/4" NPT inlet, includes 3/4" to 1/2" adapter, plug and Allen wrench, 593,000 Btu

GAS CONVERSION KITS

FG-LPCK-1 LP Conversion kit for Fire Ring model #'s FG-FR-6SS, FG-FR-12SS, FG-FR-18SS, and FG-FR-24SS

FG-LPCK-2 LP Conversion kit for Fire Ring model #'s FG-FR-30SS, FG-FR-36SS, and FG-FR-48SS

JEWELRY



HOW MUCH?

HOW MUCH MEDIA SHOULD I USE?

ROUND FIRE PITS

| INSIDE DIAMETER OF FIRE PIT | LAVA ROCK ONLY | LAVA ROCK AS A BASE | GLASS ON TOP OF LAVA ROCK | LAVA STONES ON TOP OF LAVA ROCK | LAVA BOULDERS ON TOP OF LAVA ROCK |
|-----------------------------|----------------|---------------------|---------------------------|---------------------------------|-----------------------------------|
| 16" | 10 lbs | 5 lbs | 10 lbs | 10 lbs | 1/4 box |
| 19" | 15 lbs | 10 lbs | 20 lbs | 15 lbs | 1/2 box |
| 25" | 20 lbs | 15 lbs | 30 lbs | 20 lbs | 3/4 box |
| 29" | 25 lbs | 20 lbs | 40 lbs | 25 lbs | 1 box |
| 33" | 30 lbs | 25 lbs | 50 lbs | 30 lbs | 1 box |
| 34" | 30 lbs | 25 lbs | 50 lbs | 30 lbs | 1 box |
| 44" | 50 lbs | 35 lbs | 70 lbs | 50 lbs | 2 - 3 boxes |

SQUARE FIRE PITS

| INSIDE DIAMETER OF FIRE PIT | LAVA ROCK ONLY | LAVA ROCK AS A BASE | GLASS ON TOP OF LAVA ROCK | LAVA STONES ON TOP OF LAVA ROCK | LAVA BOULDERS ON TOP OF LAVA ROCK |
|-----------------------------|----------------|---------------------|---------------------------|---------------------------------|-----------------------------------|
| 20" | 15 lbs | 10 lbs | 20 lbs | 15 lbs | 1/2 box |
| 26" | 20 lbs | 15 lbs | 30 lbs | 20 lbs | 3/4 box |
| 32" | 30 lbs | 25 lbs | 50 lbs | 30 lbs | 1 box |
| 38" | 35 lbs | 30 lbs | 60 lbs | 35 lbs | 1 1/4 box |

LINEAR FIRE PITS

| INSIDE DIAMETER OF FIRE PIT | LAVA ROCK ONLY | GLASS ONLY | LAVA STONES ONLY |
|-----------------------------|----------------|------------|------------------|
| 24" | 10 lbs | 10 lbs | 6 lbs |
| 30" | 10 lbs | 13 lbs | 10 lbs |
| 36" | 15 lbs | 15 lbs | 12 lbs |
| 48" | 16 lbs | 20 lbs | 16 lbs |
| 54" | 18 lbs | 23 lbs | 18 lbs |
| 60" | 20 lbs | 26 lbs | 20 lbs |
| 66" | 22 lbs | 28 lbs | 22 lbs |
| 72" | 24 lbs | 30 lbs | 24 lbs |



MEDIA

FOR YOUR FIRE PIT

LAVA ROCK FG-LAVA-1CUFT  



Mined from the earth, these dark rocks contrast beautifully against a bright flame. Each rock is approximately 1" to 2" in diameter.



Sold in 1 cubic foot bags

LAVA STONE FG-LS-50  



Made from tumbled lava rock, these stones lend a casual elegance. Each stone is approximately 1 - 2" in diameter.



Sold in 50 lb. bags

LAVA BOULDER FG-LB-30  



These rugged rocks are 6" to 12" in diameter, for a coastal, straight-off-the-beach style.



Sold in a 30 lb. box.



GLASS

FOR YOUR FIRE PIT

FIREGLASS Large broken approximately 1/2" to 3/4" in size



Caribbean
GL-LT BLUE



Cola
GL-COPPER



Cosmo
GL-RED



Mint
GL-GREEN




Pepper
GL-BLACK



Blueberry
GL-DARK BLUE



Seabreeze
GL-SEABREEZE



Crystal
GL-CRYSTAL

LIQUID GLASS Glass beads approximately 16-18mm in size



Cobalt
GB-COBALT



H2O
GB-CLEAR



Midnight
GB-BLACK



Sky
GB-LT BLUE



Tequila
GB-GOLD




White
GB-WHITE


REFLECTIVE GLASS Mirror finish broken reflective approximately 3/8" to 1/2" in size



Copper
GR-COPPER



Gold Finger
GR-GOLD



Cobalt
GR-COBALT



Platinum
GR-PLAT



Ebony
GR-BLACK



Bronze
GR-BRONZE



Tahiti
GRL-TAHITI

1/2" to 3/4"
Large Reflective Glass

All glass is sold in 5 lb bags. There are 8 bags per case.



JEWELRY DISPLAY FG-JEWELRY-POP-2

A retail point of purchase display for all of the glass that Firegear has to offer. The POP display holds up to 56 bags of your Firegear Glass



GLASS TOWER GL-GLASS TOWER

Firegear spinning glass tower with 20 glass cylinders. 13 inches tall x 10 inches in diameter



LOG SETS

FOR YOUR FIRE PIT



SPIT FIRE Model#: L-SF

This seventeen (17) piece refractory log set is a great alternative to enjoy your fire feature without the mess of real wood and ashes.

- Compatible with pits larger than 19"
- Refractory concrete material
- Ships as 1 box, weights approx 52 lb.
- 5 Year limited warranty



DRIFTWOOD TWIG SET Model#: 326-930

Beach washed and twisted driftwood twigs inspired this design. The coloration in this six (6) piece log set is truly unique.

- Compatible with any size fire
- Ceramic fiber composition
- Ships 1 box, weights approx 22 lb.
- 1 Year limited warranty



SEDONA Model#: L-SEDONA


The Sedona is the Grand Daddy of all the Firegear log sets. This nineteen (19) piece majestic fire pit log set can stack as high as 32".

- Compatible with pits larger than 25"
- Refractory concrete material
- Ships in 3 boxes, approx 200 lb, ships LTL
- 5 Year limited warranty

ACCESSORIES



CONTROLS



1322WT

Wireless Wall Mount On/Off/High/Low Switch, 20 foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) (TFS units only)

TM-R-AF1TX

Wireless Wall Timer (30min / 60min / 120min), 20 foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) (TFS units only)



1001D-AF1TX

Wireless wall mount switch (On/Off), 20 foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) (TFS units only)

1001-A

Wireless hand held remote (On/Off), battery operated, receiver with learn function, and a snap on wall plate for the receiver (TFS units only)



AF-4000HAT

Home/Pool automation transmitter system (works with most manufacturers systems)



AF-4000ADP24(80)

110 volts AC adapter, converts to 7.5 DC volts for TFS systems. Requires a weatherproof enclosure.



WINDSHIELDS




ROUND

- GWS-23R Tempered glass windshield for a 16" - 19" round pan
- GWS-34R Tempered glass windshield for a 25" - 29" round pan



SQUARE

- GWS-2424 Tempered glass windshield for a 20" square pan
- GWS-3030 Tempered glass windshield for a 26" square pan
- GWS-3838 Tempered glass windshield for a 32" square pan
- GWS-4242 Tempered glass windshield for a 38" square pan

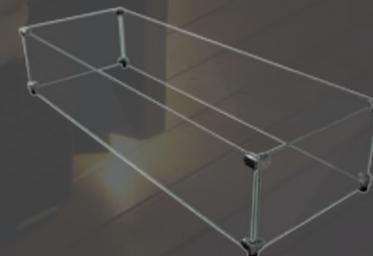

LINEAR

- GWS-3410 Tempered glass windshield for a 24" L Series burner
- GWS-3810 Tempered glass windshield for a 30" L Series burner
- GWS-4410 Tempered glass windshield for a 36" L Series burner
- GWS-3410 Tempered glass windshield for a 30" Line of Fire
- GWS-4210 Tempered glass windshield for a 36" Line of Fire
- GWS-6010 Tempered glass windshield for L Series Combinations:
 - FPB-24L + FPB-24L when installed end-to-end
 - FPB-30L + FPB-24L when installed end-to-end
- GWS-6810 Tempered glass windshield for L Series Combinations:
 - FPB-30L + FPB-30L when installed end-to-end
 - FPB-36L + FPB-24L when installed end-to-end
- GWS-8410 Tempered glass windshield for L Series Combinations:
 - FPB-36L + FPB-30L when installed end-to-end
 - FPB-36L + FPB-36L when installed end-to-end


LIDS

Firegear lids are constructed of 304 Stainless Steel with brushed finish and handle. These lids are great for covering your fire pit without logs when not in use.



ROUND

- LID-16R Stainless steel lid for a 16" round pan
- LID-19R Stainless steel lid for a 19" round pan
- LID-25R Stainless steel lid for a 25" round pan
- LID-29R Stainless steel lid for a 29" round pan
- LID-33R Stainless steel lid for a 33" round pan



SQUARE

- LID-20S Stainless steel lid for a 20" square pan
- LID-26S Stainless steel lid for a 26" square pan
- LID-32S Stainless steel lid for a 32" square pan
- LID-38S Stainless steel lid for a 38" square pan



LINEAR

- LID-24L Stainless steel lid for a 24" L Series burner
 - LID-30L Stainless steel lid for a 30" L Series burner
 - LID-36L Stainless steel lid for a 36" L Series burner
 - LID-60L Stainless steel lid for (2) FPB-24L end to end
 - LID-68L Stainless steel lid for (2) FPB-30L end to end
 - LID-84L Stainless steel lid for (2) FPB-36L end to end
-
- LID-LOF30 Stainless steel lid for a 30" Line of Fire
 - LID-LOF36 Stainless steel lid for a 36" Line of Fire



MSI KITS & VENTS




MSI-BSMTI

Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery



MSI-BSTMS

Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit Includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery.

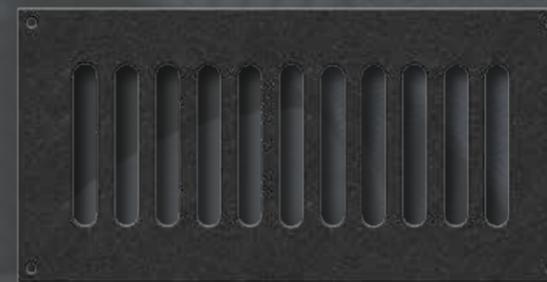

VENT-KIT-6X12

Vent kit: includes two (2) 6" tall x 12" wide vents with mounting screws. Each vent provides 18 square inches of ventilation

HOSES & REGULATORS



FG-32LPHRK LP

32" Liquid Propane Hose and Regulator Kit, Rated at 85,375 Btu 10" WC. CSA - AGA / CGA Approved, 3/8" Flared ID



FG-12QDK NG LP

Quick Disconnect Kit for use with Natural Gas or Liquid Propane - 12' (144"), 3/8" I.D. Gray PVC Galvanized Steel Hose, Quick Disconnect Fitting and Socket Dust Cap, 80,000 Btu. CSA-AGA/CGA approved to -40 Degrees F



FG-60LPHRK LP

60" Liquid Propane Hose and Regulator Kit, Rated at 130,000 Btu 10" WC. CSA - AGA / CGA Approved, 3/8" Flared ID



FG-LPRK LP

Rated at 100,000 Btu Liquid Propane Regulator, 3/8" MPT Adapter and Acme Quick Connect. CSA-AGA/CGA approved

KEY VALVES



KVSC-PC-8

Standard Capacity Straight Key Valve with Polished Chrome Cover and 8" Key, 158,000 Btu @ 1/2 PSI



KVHC-PC-8

High Capacity Straight Key Valve with Polished Chrome Cover and 8" Key, 350,000 Btu @ 1/2 PSI



KEY-BLK-3

3" Flat Black Key for Key Valve



KEY-PC-3

3" Polished Chrome Key for Key Valve



KEY-PC-8

8" Polished Chrome Key for Key Valve



KEY-PC-12

12" Polished Chrome Key for Key Valve



KC-BLK

Key Valve Cover - Flat Black. Will not fit the PAVER-KIT-MT Control Panels. fits KVSC Valve ONLY!



KEY-PC

Key Valve Cover - Polished Chrome



VALVES & FITTINGS



01-387
Connector Ball Valve
3/8" OD Flare x 1/2" FIP



01-487
Connector Ball Valve
1/2" OD Flare x 1/2" FIP



01-266
Flare Ball Valve
3/8" OD Flare x 3/8" OD Flare



01-288
Flare Ball Valve
1/2" OD Flare x 1/2" OD Flare



U1-6C-S
Steel Gas Flare Fitting, 3/8" OD Flare x 3/8" MIP (Tapped 1/8" FIP)



U1-6D-S
Steel Gas Flare Fitting, 3/8" OD Flare x 1/2" MIP (Tapped 3/8" FIP)



U3-6C-S
Steel Gas Flare Fitting, 3/8" OD Flare x 3/8" FIP



U1-8D-S
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" MIP (Tapped 3/8" FIP)



49-66
Steel Gas Flare Fitting, 3/8" OD Flare x 3/8" MIP Elbow



50-68
Steel Gas Flare Fitting, 3/8" OD Flare x 1/2" FIP Elbow



U1-8C-S
Steel Gas Flare Fitting, 1/2" OD Flare x 3/8" MIP (Tapped 1/4" FIP)



50-88
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" FIP Elbow



U3-8C-S
Steel Gas Flare Fitting, 1/2" OD Flare x 3/8" FIP



U3-8D-S
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" FIP



49-88
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" MIP Elbow



46-88
Brass Female Connector, 1/2" OD x 1/2" FIP



46-66
Brass Female Connector, 3/8" OD x 3/8" FIP



42-R-86
Brass Reducing Union, 1/2" x 3/8"



46-86
Brass Female Connector, 1/2" OD x 3/8" FIP



48-86
Brass Female Connector, 1/2" OD x 3/8" MIP



U3-6D-S
Steel Gas Flare Fitting, 3/8" OD Flare x 1/2" FIP



113BS-E5
Schedule 40 Black Steel Pipe Nipple, 5" Long 3/4" MIP



113BS-C
Schedule 40 Black Steel Pipe Nipple, Close 3/8" MIP



BS309-6
Schedule 40 Black Steel 90 Degree Elbow, 3/8"



SS499-8
1/2" 304 Stainless Steel coupling



SS4310-8
1/2" 304 Stainless Steel street elbow

FLEX LINES

CSA Approved Stainless Steel Gas Hearth Connectors Available in 3/8" & 1/2" OD with Flared Fittings Stainless or Black Coated Stainless.

Tranquiline "Non-Whistling" Gas Flex Lines with and without fittings. For flex lines with fittings, call for part numbers and pricing.



T100 SERIES



- T100-9898-10 Tranquiline flex connector, 3/8" OD (1/4" ID) x 10", with 3/8" OD flare nuts
- T100-9898-16 Tranquiline flex connector, 3/8" OD (1/4" ID) x 16", with 3/8" OD flare nuts
- T100-9898-22 Tranquiline flex connector, 3/8" OD (1/4" ID) x 22", with 3/8" OD flare nuts
- T100-9898-28 Tranquiline flex connector, 3/8" OD (1/4" ID) x 28", with 3/8" OD flare nuts
- T100-9898-34 Tranquiline flex connector, 3/8" OD (1/4" ID) x 34", with 3/8" OD flare nuts

T200 SERIES



- T200-9898-10 Tranquiline flex connector, 1/2" OD (3/8" ID) x 10", with 1/2" OD flare nuts
- T200-9898-16 Tranquiline flex connector, 1/2" OD (3/8" ID) x 16", with 1/2" OD flare nuts
- T200-9898-22 Tranquiline flex connector, 1/2" OD (3/8" ID) x 22", with 1/2" OD flare nuts
- T200-9898-28 Tranquiline flex connector, 1/2" OD (3/8" ID) x 28", with 1/2" OD flare nuts
- T200-9898-34 Tranquiline flex connector, 1/2" OD (3/8" ID) x 34", with 1/2" OD flare nuts
- T200-9898-46 Tranquiline flex connector, 1/2" OD (3/8" ID) x 46", with 1/2" OD flare nuts



T102 SERIES



- T102-9898-10 Tranquiline flex connector, 3/8" OD (1/4" ID) x 10", with 3/8" OD flare nuts, Black Coated
- T102-9898-16 Tranquiline flex connector, 3/8" OD (1/4" ID) x 16", with 3/8" OD flare nuts, Black Coated
- T102-9898-22 Tranquiline flex connector, 3/8" OD (1/4" ID) x 22", with 3/8" OD flare nuts, Black Coated
- T102-9898-28 Tranquiline flex connector, 3/8" OD (1/4" ID) x 28", with 3/8" OD flare nuts, Black Coated
- T102-9898-34 Tranquiline flex connector, 3/8" OD (1/4" ID) x 34", with 3/8" OD flare nuts, Black Coated

T202 SERIES



- T202-9898-10 Tranquiline flex connector, 1/2" OD (3/8" ID) x 10", with 1/2" OD flare nuts, Black Coated
- T202-9898-16 Tranquiline flex connector, 1/2" OD (3/8" ID) x 16", with 1/2" OD flare nuts, Black Coated
- T202-9898-22 Tranquiline flex connector, 1/2" OD (3/8" ID) x 22", with 1/2" OD flare nuts, Black Coated
- T202-9898-28 Tranquiline flex connector, 1/2" OD (3/8" ID) x 28", with 1/2" OD flare nuts, Black Coated
- T202-9898-34 Tranquiline flex connector, 1/2" OD (3/8" ID) x 34", with 1/2" OD flare nuts, Black Coated



DEALER TOOLS

THE SELLING TOOLS YOU NEED

FIREGEAR KIOSK FG-KIOSK-KIT

The Firegear three-sided spinning kiosk provides a step-by-step guideline on how to select the proper products to build a fire pit.

Includes: FG-KIOSK-OUTDOOR, DBS-22 Burning Spur, KIOSK-FPB-16MT, KIOSK-FPB-20TMS, FPB-30LTFS, KIOSK-GLASS-JARS, FG-AD-BANNER and supply of FG-LIT-BROCHURE



Dimensions: 75" Tall x 22" Wide

FIREGEAR BANNER FG-AD-BANNER

Firegear authorized dealer banner. 2 feet high x 4 feet long



JEWELRY DISPLAY FG-JEWELRY-POP-2

A retail point of purchase display for all of the glass that Firegear has to offer. The POP display holds up to 56 bags of your Firegear Glass



Dimensions: 64" Tall x 26" Wide x 17" Deep

GLASS TOWER GL-GLASS TOWER

Firegear spinning glass tower with 20 glass cylinders. 13 inches tall x 10 inches in diameter





9230 CONSERVATION WAY
FORT WAYNE, IN 46809

TECHNICAL SUPPORT: 1.855.498.8324
SALES SUPPORT: 1.888.672.8929

www.firegearoutdoors.com